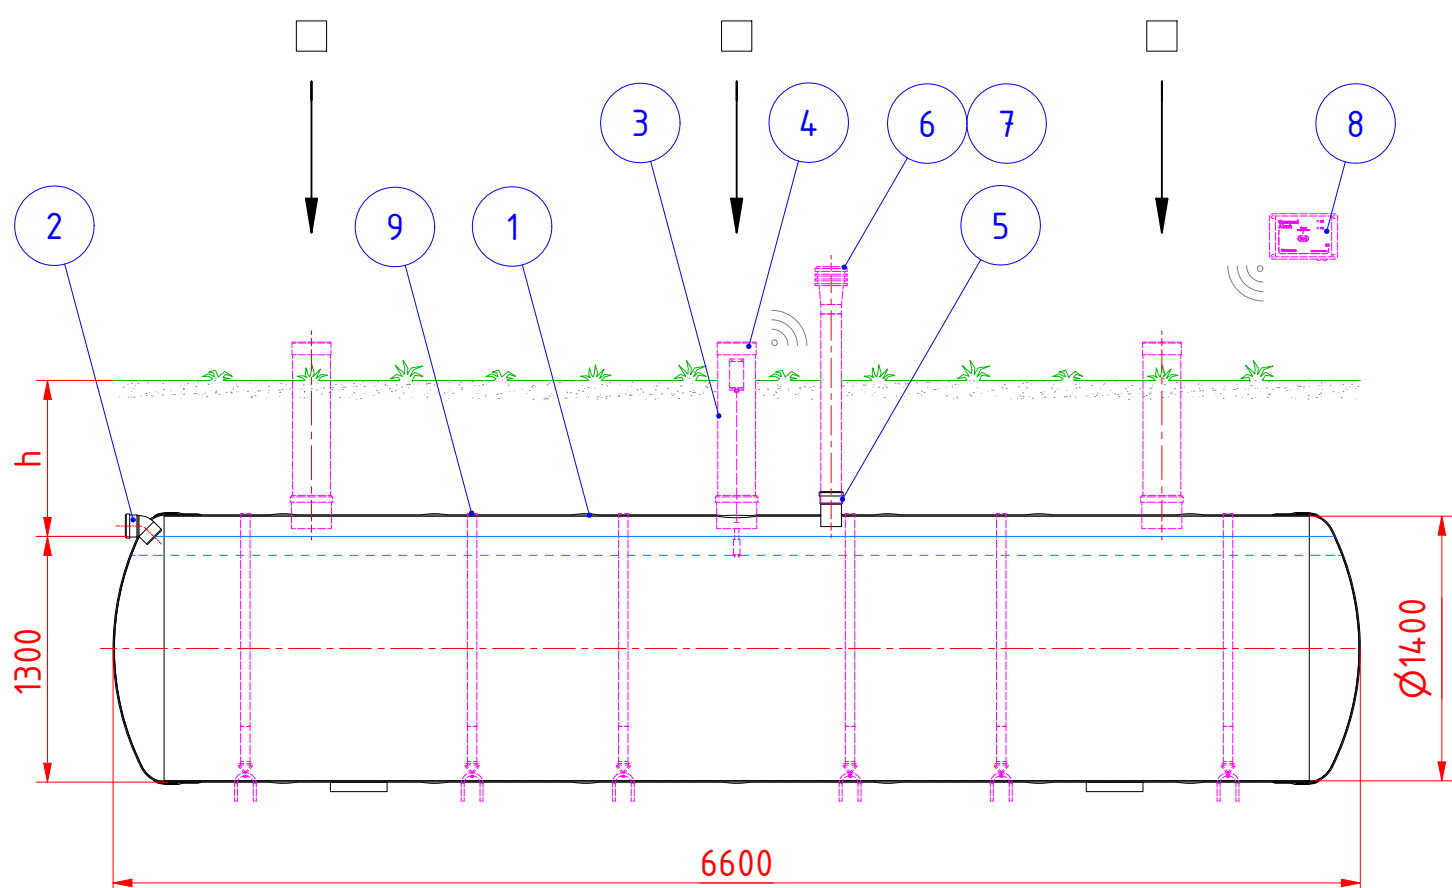
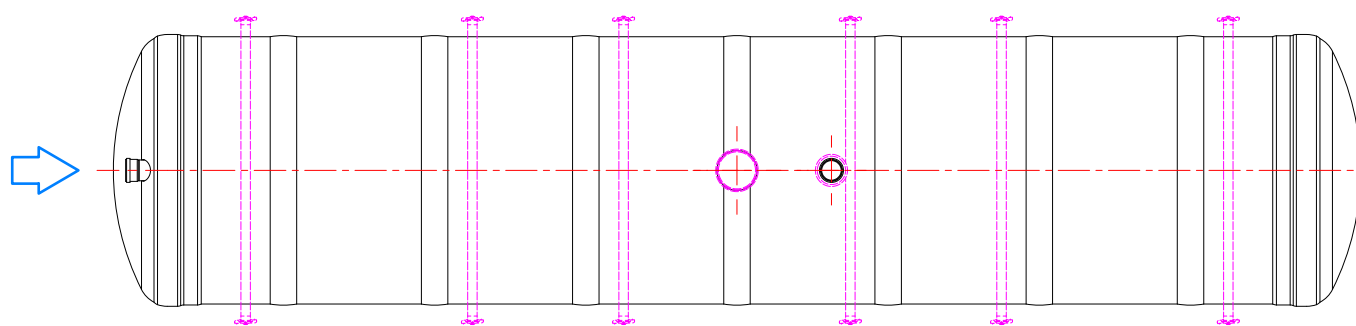
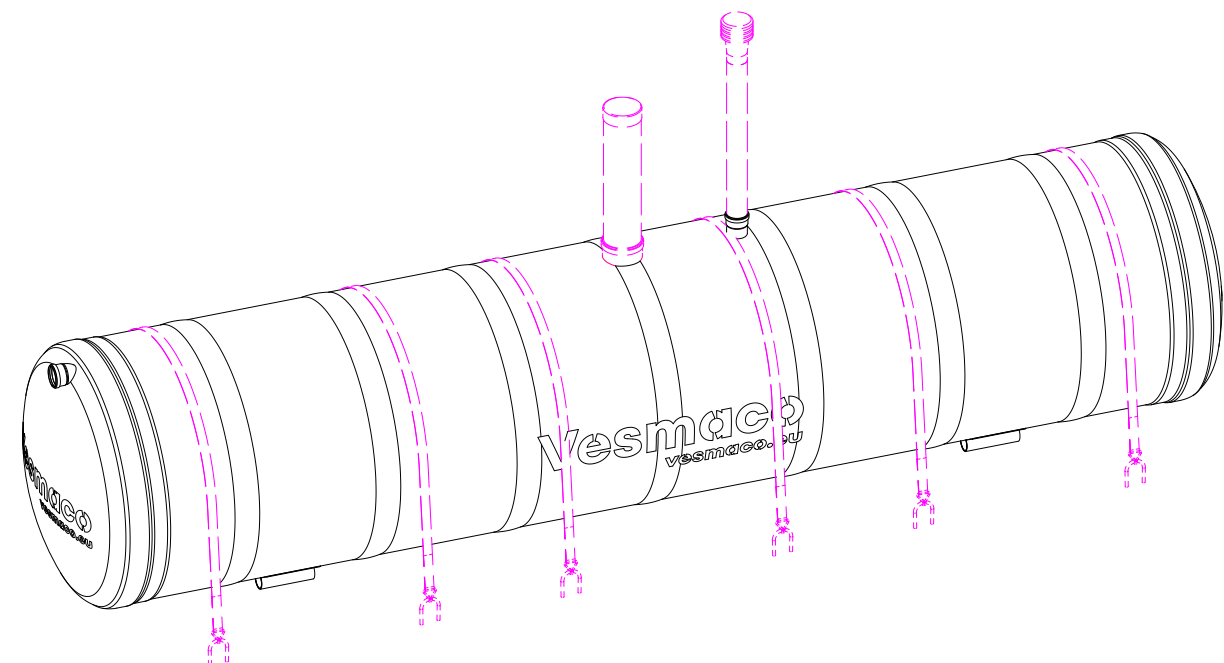


1	2	3	4	5	6	7	8																																																																																																																											
A	Mark the location of the maintenance shaft							A																																																																																																																										
B								B																																																																																																																										
C								C																																																																																																																										
D								D																																																																																																																										
E	Order approval form (to be filled by Vesmaco) <table><tr><td>Product number</td><td>Readiness date</td></tr><tr><td colspan="2">Approved by (name and signature)</td></tr></table>							Product number	Readiness date	Approved by (name and signature)		E																																																																																																																						
Product number	Readiness date																																																																																																																																	
Approved by (name and signature)																																																																																																																																		
F	<table><tr><td>9</td><td>OPTION: Anchor strap with tensioner ☐ (tick if appropriate)</td><td>Polyester/GST</td><td>L=5,5+0,5 m</td><td>(6)</td></tr><tr><td>8</td><td>OPTION: High level alarm device ☐ (tick if appropriate)</td><td></td><td></td><td>(1)</td></tr><tr><td>7</td><td>OPTION: Ventilation pipe with anti-odour filter ☐ (tick if appropriate)</td><td></td><td></td><td>(1)</td></tr><tr><td>6</td><td>OPTION: Ventilation pipe ☐ (tick if appropriate)</td><td></td><td></td><td>(1)</td></tr><tr><td>5</td><td>Ventilation pipe connection</td><td>PVC</td><td>D110</td><td>1</td></tr><tr><td>4</td><td>Cover (tick if appropriate)</td><td></td><td></td><td></td></tr><tr><td></td><td>Plastic cap ☐</td><td></td><td></td><td>(1)</td></tr><tr><td></td><td colspan="3">OPTION: Cover (EN 124) – class A15 (1,5 t) ☐ / B125 (12,5 t) ☐ / C250 (25 t) ☐ / D400 (40 t) ☐</td><td></td></tr><tr><td>3</td><td>Maintenance shaft (tick appropriate box)</td><td></td><td></td><td>1</td></tr><tr><td></td><td>Pipe PVC D200, h= 500...1000 mm ☐</td><td></td><td></td><td></td></tr><tr><td></td><td>OPTION: Pipe D400, h= 500...1000 mm ☐</td><td></td><td></td><td></td></tr><tr><td></td><td>OPTION: Shaft D600, h= 500...1500 mm ☐</td><td></td><td></td><td></td></tr><tr><td>2</td><td>Inlet pipe (tick appropriate box)</td><td>PVC NAL</td><td>D110 ☐ D160 ☐</td><td>1</td></tr><tr><td>1</td><td>Cesspool MK-10 D1400 L6600</td><td colspan="2">Ø1400×6600 mm</td><td></td></tr><tr><td></td><td>Glass-reinforce plastic (GRP) "Vesmaco Composite", pH 3-10, heat resistance max 60°C</td><td colspan="2"></td><td>1</td></tr><tr><td></td><td>Total volume</td><td colspan="2">10000 l</td><td></td></tr><tr><td colspan="4">Title, Supplementary title</td><td>Size</td><td colspan="2">Scale</td></tr><tr><td colspan="4">Cesspool 10 m³ D1400 L6600</td><td>A3</td><td colspan="2">1 : 40</td></tr><tr><td colspan="2" rowspan="3">Vesmaco Vesmaco OÜ Katusepapi 6, 11412 Tallinn, Estonia www.vesmaco.eu</td><td colspan="4">910014100B_MK-10_D1400-L6600_EN</td></tr><tr><td colspan="2">Document type</td><td colspan="2">Document status</td></tr><tr><td colspan="2">General assembly drawing</td><td colspan="2">Released</td></tr><tr><td colspan="2"></td><td>910014100</td><td>Date of issue</td><td>REV</td><td colspan="2">Sheet</td></tr><tr><td colspan="2"></td><td></td><td>15.08.2025</td><td>B</td><td colspan="2">1/1</td></tr></table>							9	OPTION: Anchor strap with tensioner ☐ (tick if appropriate)	Polyester/GST	L=5,5+0,5 m	(6)	8	OPTION: High level alarm device ☐ (tick if appropriate)			(1)	7	OPTION: Ventilation pipe with anti-odour filter ☐ (tick if appropriate)			(1)	6	OPTION: Ventilation pipe ☐ (tick if appropriate)			(1)	5	Ventilation pipe connection	PVC	D110	1	4	Cover (tick if appropriate)					Plastic cap ☐			(1)		OPTION: Cover (EN 124) – class A15 (1,5 t) ☐ / B125 (12,5 t) ☐ / C250 (25 t) ☐ / D400 (40 t) ☐				3	Maintenance shaft (tick appropriate box)			1		Pipe PVC D200, h= 500...1000 mm ☐					OPTION: Pipe D400, h= 500...1000 mm ☐					OPTION: Shaft D600, h= 500...1500 mm ☐				2	Inlet pipe (tick appropriate box)	PVC NAL	D110 ☐ D160 ☐	1	1	Cesspool MK-10 D1400 L6600	Ø1400×6600 mm				Glass-reinforce plastic (GRP) "Vesmaco Composite", pH 3-10, heat resistance max 60°C			1		Total volume	10000 l			Title, Supplementary title				Size	Scale		Cesspool 10 m ³ D1400 L6600				A3	1 : 40		Vesmaco Vesmaco OÜ Katusepapi 6, 11412 Tallinn, Estonia www.vesmaco.eu		910014100B_MK-10_D1400-L6600_EN				Document type		Document status		General assembly drawing		Released				910014100	Date of issue	REV	Sheet					15.08.2025	B	1/1		F
9	OPTION: Anchor strap with tensioner ☐ (tick if appropriate)	Polyester/GST	L=5,5+0,5 m	(6)																																																																																																																														
8	OPTION: High level alarm device ☐ (tick if appropriate)			(1)																																																																																																																														
7	OPTION: Ventilation pipe with anti-odour filter ☐ (tick if appropriate)			(1)																																																																																																																														
6	OPTION: Ventilation pipe ☐ (tick if appropriate)			(1)																																																																																																																														
5	Ventilation pipe connection	PVC	D110	1																																																																																																																														
4	Cover (tick if appropriate)																																																																																																																																	
	Plastic cap ☐			(1)																																																																																																																														
	OPTION: Cover (EN 124) – class A15 (1,5 t) ☐ / B125 (12,5 t) ☐ / C250 (25 t) ☐ / D400 (40 t) ☐																																																																																																																																	
3	Maintenance shaft (tick appropriate box)			1																																																																																																																														
	Pipe PVC D200, h= 500...1000 mm ☐																																																																																																																																	
	OPTION: Pipe D400, h= 500...1000 mm ☐																																																																																																																																	
	OPTION: Shaft D600, h= 500...1500 mm ☐																																																																																																																																	
2	Inlet pipe (tick appropriate box)	PVC NAL	D110 ☐ D160 ☐	1																																																																																																																														
1	Cesspool MK-10 D1400 L6600	Ø1400×6600 mm																																																																																																																																
	Glass-reinforce plastic (GRP) "Vesmaco Composite", pH 3-10, heat resistance max 60°C			1																																																																																																																														
	Total volume	10000 l																																																																																																																																
Title, Supplementary title				Size	Scale																																																																																																																													
Cesspool 10 m ³ D1400 L6600				A3	1 : 40																																																																																																																													
Vesmaco Vesmaco OÜ Katusepapi 6, 11412 Tallinn, Estonia www.vesmaco.eu		910014100B_MK-10_D1400-L6600_EN																																																																																																																																
		Document type		Document status																																																																																																																														
		General assembly drawing		Released																																																																																																																														
		910014100	Date of issue	REV	Sheet																																																																																																																													
			15.08.2025	B	1/1																																																																																																																													
1	2	3	4	5	6	7	8																																																																																																																											

h = _____ (installation height, max. 1500 mm)

Approved by the client:

_____, 20____, _____ (date) (client's representative)

Installation must be carried out in accordance with the Vesmaco installation manuals.
Vesmaco reserves the right to make unilateral changes.